

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 May 2005 (06.05.2005)


PCT

(10) International Publication Number
WO 2005/041599 A1

- (51) International Patent Classification⁷: **H04Q 7/30**, (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/SE2003/001644
- (22) International Filing Date: 23 October 2003 (23.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-164 83 Stockholm (SE).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): BLADSJÖ, David [SE/SE]; Bastugatan 55 1/2tr, S-118 25 Stockholm (SE). WESTERBERG, Erik [SE/SE]; Hemmansvägen 7, S-122 38 Enskede (SE).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (74) Agent: AROS PATENT AB; P.O. Box 1544, S-751 45 Uppsala (SE).
- Published:
— with international search report
— with amended claims

[Continued on next page]

(54) Title: METHOD AND ARRANGEMENT FOR POLLING MANAGEMENT

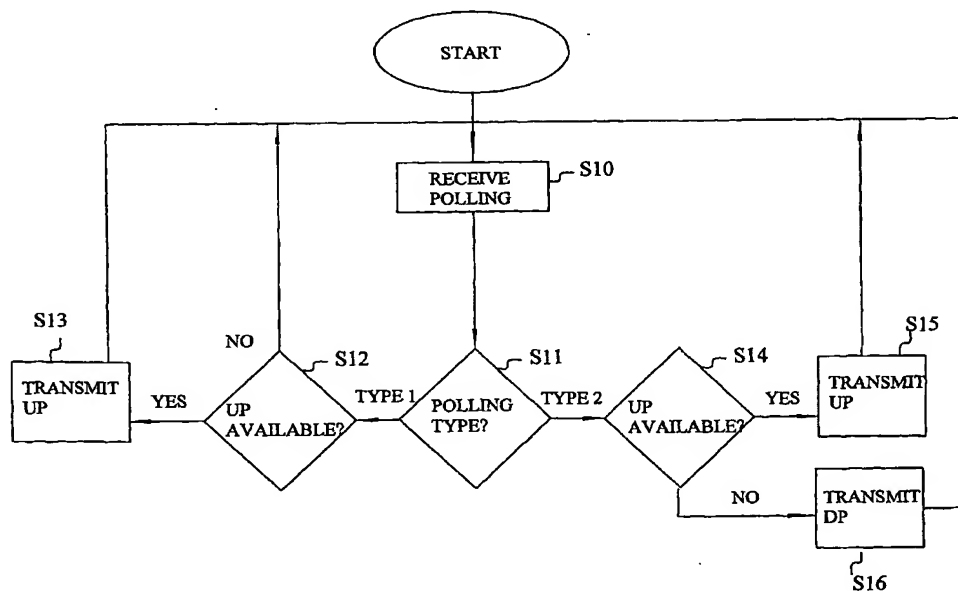

(57) Abstract: In a packet-based communication network (10) polling of connected user equipment is performed according to a first type (T1) and a complementary second type (T2). Upon receiving polling according to type one (T1) a user equipment (30) is allowed to transmit user data packets (UP) if any are available, otherwise the user equipment (30) can remain silent. In response to polling according to type two (T2), the user equipment (30) is required to either transmit an available user data packet (UP) or a dummy data packet (DP).



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.